


2/2 Pipe mounting Direct acting - Normally closed



161.4 Series


161.4 Series is a robust and compact solution with a good value for money. A wide range of product solutions including 1/8" and 1/4" ports and different flow rates are available. Compact design and small size operator make this valve a good solution whenever a space savings are targeted. A wide range of IP65 electrical parts might be used with this valve.

Typical application for 161.4 Series is cold water loading function or hot water on/off control.

- Fluids:** Cold and hot water, within the media temperature limits.
Valve body: Moulded brass, CW617N UNI EN 12165.
Seals: FKM
Plungers: Stainless Steel.

Port Size G	Orifice mm	Flow Factors		Admissible Differential Pressure bar			Fluid Maxi. Temp. C°	Seat Disc	Reference Numbers		Power Consumption (W)		WT. (g)	Dimensional Ref
		m³/h	l/min	Minimum Pressure	Maximum Differential Pressure				Pressure Vessel	Electrical Part	DC	AC		
1/8" G	2.2	0.12	2	0	10	6	140	FKM	161.4AV	KT	10	9	200	5
1/4" G	2.2	0.12	2	0	10	6	140	FKM	161.4EV	KT	10	9	220	5

PN 20 bar

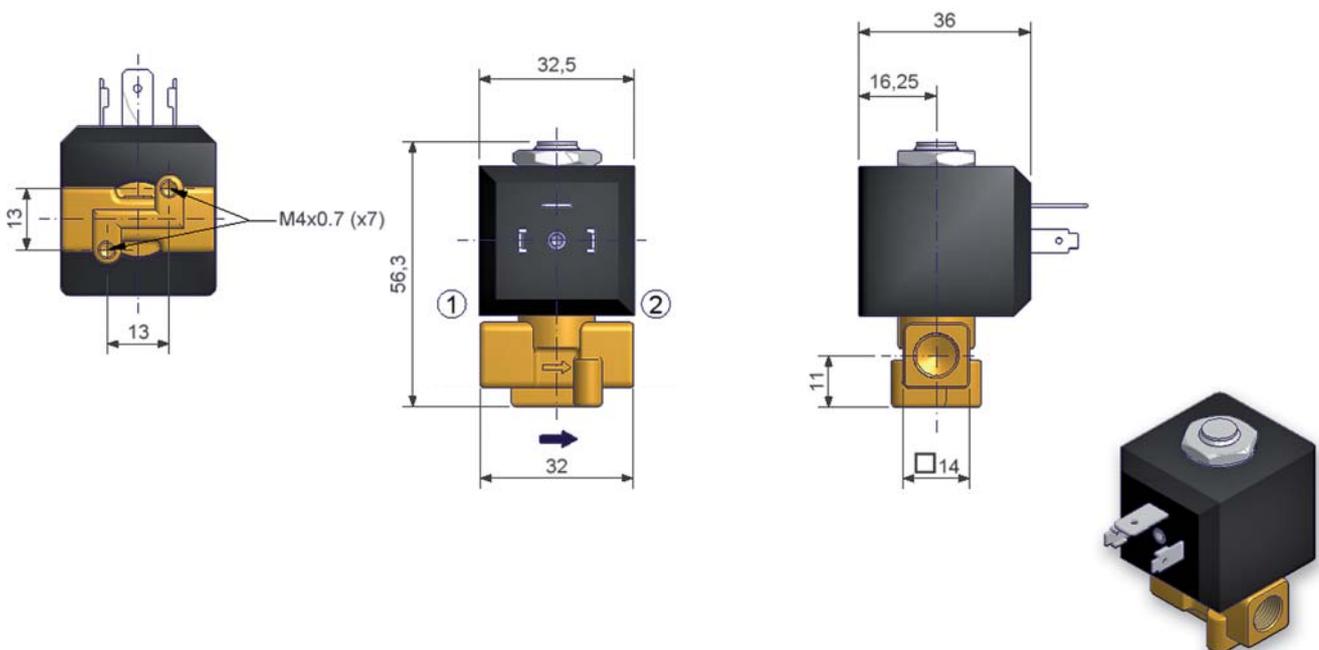

All dimensions are in mm

Dimensional Drawing N° 5