



USF-15~50

Normally close types

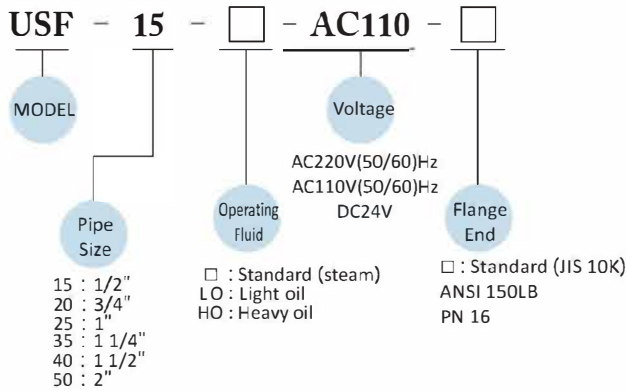

PRODUCT DESCRIPTION

- USF series is multiplex, pilot operated piston, conductive and normally closed (NC) 2/2 way solenoid valve.
- Availability of fluid type: steam, heavy oil, Light oil

CAUTIONS:


- Minimum pressure to open: over 0.5~1kgf-cm²
- Before pipelining, the pipe line must be very clean without any contaminants or any other things not ought to be existed.
- To prolong the life time of the product, Y-line filter should be installed in the front end of solenoid valve.
- AC voltage tolerance: ± 10%; DC voltage tolerance: ± 1%
- It should be installed horizontally; vertical installation is not advisable.

Not Suitable For Fluid As Below:

- Liquid status when it is high temperature; solid status when it is cool.
- Corrosive fluid
- Viscosity over 20 cst

MATERIAL:

PARTS	Coil	Tube	Spring	Core	Plug	Piston	Piston plug	Valve body
MATERIAL	Special copper wire (H class)	Stainless steel	Stainless steel	Stainless steel	PTFE +15%GF	Brass	PTFE	Cast Bronze

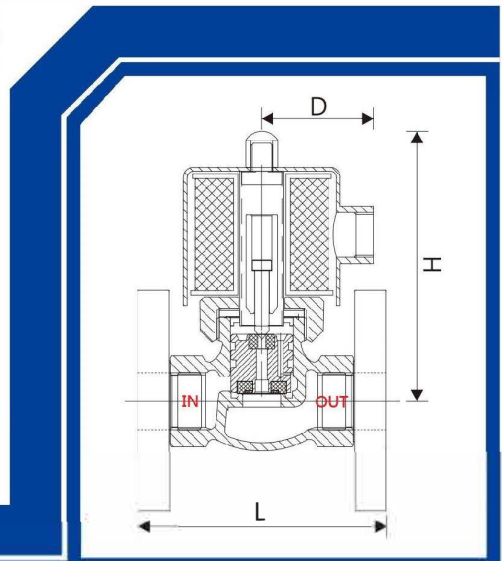

SPECIFICATION

MODEL	Waterproof DIN/flying lead Coil	NASS DIN Coil (IP65)	PIPE SIZE	CV	ORIFICE	FLUID TEMP. (°C)	Operating Pressure kgf / cm ² (bar)					Dimension (mm)			Weight (kg)
							Water	Air	Steam	heavy oil	Gas	L	H	D	
USF-15			1/2"	4.0	17mm	-5°C ~ +185°C			0.5~10	0.5~10		110	125	58	2.8
USF-20			3/4"	6.0	17mm	-5°C ~ +185°C			0.5~10	0.5~10		110	125	58	3.2
USF-25			1"	12	22mm	-5°C ~ +185°C			0.5~10	0.5~10		120	133	58	4.4
USF-35			1 1/4"	18	30mm	-5°C ~ +185°C			1~10	1~10		140	141	58	6.3
USF-40			1 1/2"	22	30mm	-5°C ~ +185°C			1~10	1~10		140	144	58	6.5
USF-50			2"	48	50mm	-5°C ~ +185°C			1~10	1~10		195	175	58	10.9